

Surface Defect Detection

for **Wire, Cable, Pipe, Tube and Cable Wraps**



› Ensure your product is Defect Free

The Surface Inspector is the only tool that can capture, display and analyze every square millimeter of your product, including: cable jacket, pipe, tube, bar stock or water soluble tape. It is the most thorough method of detecting surface flaws available. With Taymer's Surface Inspector, you can be sure the product going to your customers meets your high standards and is without surface defects.

› Reduced Defects

The Surface Inspector provides the operator with a view of current surface images as well as the most recent surface defects with defect dimensions. This continuous stream of real time information - especially failure data - allows the operator to isolate the causes of jacket imperfections or water soluble tape folds. Identifying when and how a defect occurs allows your technical staff to reduce occurrences of surface defects and prevent customer complaints and rejects.

› Quality Assurance

The Surface Inspector will capture images of your printed cable, save the images to disk and allow you to print them out to include in your quality reporting both internally and to your customers. The Surface Inspector's display also makes it easy for engineering and production supervisors to examine the defect without having to see the defect itself. Defect locations are recorded together with the image of the defect allowing your operators to find and eliminate defects before they reach your customers or fail in the field.

FEATURES

- › Detects jacket defects, pinholes, bulges, neckdowns, outer diameter defects, fish eyes, scratches, discolorations, surface blemishes or other imperfection on wire/cable jacket, metal tube, bare wires, and tape
- › Supports line speeds up to 400 meters per minute or 1,300 feet per minute
- › 3 camera configuration to provide 360° coverage of product surface and 100% of product length
- › Alerts operator and production machinery if any defects are found
- › Records any defects for QA records and operator verification
- › Accurately measures and records product diameter along 1 or 3 axes
- › Saves length information for each defect to allow operators to easily locate the defects after detection
- › Integrates with external PLC to provide defect and product measurement information
- › Generates reports containing relevant product diameter, defect, and measurement information

SPECIFICATIONS

➤ Maximum Line Speed:

400 m/min | 1,300 ft/min
Higher speed may be available depending on application

➤ Minimum Detectable Defect Size:

0.025 mm and up | 0.001" and up
Depends on line speed and product diameter

➤ Outer Diameter Range:

Up to 25 mm | Up to 1"
diameters available upon requests

➤ Camera Configuration:

3 camera - 100% coverage of product circumference

➤ Pixels/mm²: ~1,500 for small diameter product

➤ Types of Defects Detected:

Jacket defects, pin holes, neck downs, bulges, OD defects, fish eyes, discolorations, scratches or other imperfections

➤ Percent Overlap Between Images: 5%

➤ Dimensions:

Without stand:

710 mm x 490 mm x 625 mm - L x W x H
27" x 19" x 24.5" - L x W x H

With stand: (Custom stands can be built)

876 mm x 406 mm x 1790 mm - L x W x H
34.5" x 16" x 77.5" - L x W x H

➤ Location:

Before Printer, on wires without print legends. Can optionally be installed after the printer and water trough



➤ Power Supply: 110V or 220V, 50/60Hz

➤ Weight: 45 kg | 100 lbs.

➤ Lighting: LED

➤ Image Processing:

All images from all cameras are read, enhanced and analyzed, resulting in 100% product coverage at the maximum line speed

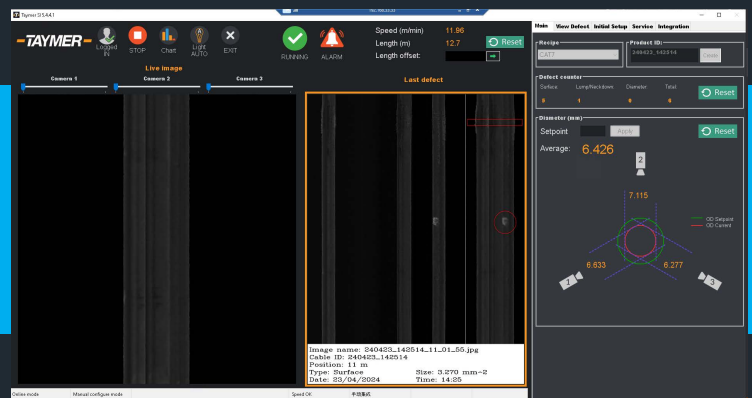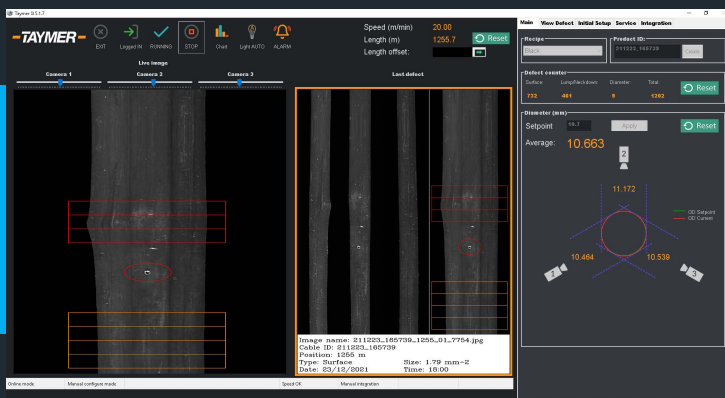

-TAYMER-

+1 905 479 2614

info@taymer.com

+1 905 479 2636

www.taymer.com

Taymer International Inc. - 208 Telson Road Markham, ON L3R 1E6 - CANADA